

## Technical Data

Bulb Type: 1.2W LED (SMD), 6000K  
Battery: 3 x 1.5V AA



Conformity with all relevant UKCA Directive requirements.



Conformity with all relevant EC Directive requirements.



This is a Class 3 product.



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.



This product is not suitable for dimming.



This product is rated at IP44.

## Care and Safety

We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.  
Mirror-Use a damp cloth or a propriety glass cleaner. Do not use abrasive materials as these will damage the finish.  
For your safety, always switch off the power supply before changing lightbulbs, or cleaning.




The mirror must be replaced immediately should it become cracked or damaged. This fitting must not be used without the mirror in place.

Instruction manual

# Toba Battery Operated Mirror

51898

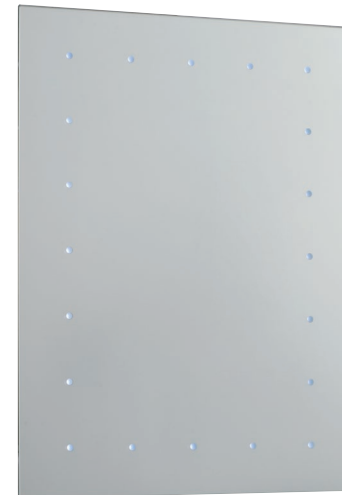

V5 21/09/2022

UK Manufacturer: BH17 7BY  
EU Manufacturer: Brilliant AG,  
Brilliantstrasse 1, D-27442 Gnarrenburg

saxby  
lighting

www.saxbylighting.com

saxby  
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

## Warning



This is a Class 3 product.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Check the pack and make sure you have all the parts listed.

Install in accordance with the IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off and took out the batteries before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

This product contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

## Layout

This product is battery powered and is therefore exempt from IEE wiring regulations concerning bathrooms.

This product is suitable for all areas of a bathroom. The chosen location should allow for the product to be securely mounted. (e.g. to a stud wall framework)

This product can be mounted either vertically (portrait) or horizontally (landscape)

## Installation

- Decide if the mirror is to be installed landscape or portrait. This mirror fixes to the wall by locating the keyhole shaped slots over the mounting screws in the wall. It is important to get the screw positions correct to ensure easy and secure fitting.
- Measure the distance between the hole centres on the fixing lugs. Mark the positions of the screw holes on the wall. Check for concealed pipes and wiring before drilling. Use suitable drill bits for masonry and ceramic tiles.
- Supplied wall plugs are for solid walls only. For all other wall types ensure correct fixings are used. Fit appropriate wall fixings and fit supplied screws. Screw heads must protrude approx 3-5mm from the wall to enable lugs to fit over adequately.
- Fit mirror onto screw heads - check the screw heads are securely located into the keyhole slots.
- Switch mirror on.

## Fitting/Replacing Batteries

**This product requires 3x 1.5V AA batteries**

- The performance of the product will depend on the quality and type of batteries used. Always use good quality batteries. The battery tube is attached to the rear of the mirror with spring clips for easy access to batteries. It can also be completely removed from the product - by disconnecting the jack plug and socket.
- Loosen 2 screws on battery tube switch end. Remove lid, insert batteries, observing correct polarity (+ end of batteries towards switch end). Refit lid, secure screws and switch-on to test.
- Batteries are to be inserted with the correct polarity.
- Different types of batteries (alkaline, ordinary or rechargeable) or new and used batteries are not to be mixed.
- Exhausted batteries are to be removed from the product to prevent leakage.
- The supply terminals of batteries are not to be shortcircuited.
- Non-rechargeable batteries are not to be recharged.
- Rechargeable batteries are to be removed from the product before being charged.
- Do not dispose of used batteries with your household waste.

