


LED Driver Constant Current Dimmable 40/50W

Features:

- Independent compact design
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II
- Dimmable
- Adjustment current

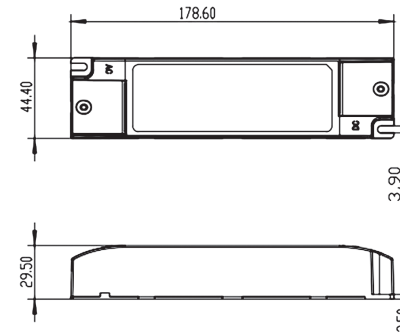

Parameters:

Model No.	Input voltage (V)	Output voltage (V)	Output current (A)	Power factor (λ)	Ambient temperature t_a (°C)	Max. casing temperature t_c (°C)	Type of light source for which it is intended	Efficiency full load (%)	No-load power (Pno in W)	Standby power (Psb in W)	Suit for dimming (Y/N)	Networked standby power (Pnet in W)	For OLED and HL Maxmium output power (W)	Max. output (W)	Dimensions LxWxH (mm)	Weight (g)
98449	220-240	30-42	1/1.2	>0.9	-25...+40	80	LED	87	≤ 1	N/A	Y	N/A	N/A	52	178.6x44.4x29.5	120

Saxby Lighting, Cabot Lane, Creekmoor, Poole, Dorset, BH17 7BY.

T: (+44) 0333 00 333 08 F: (+44) 01202 409811 E: sales@saxbylighting.com

www.saxbylighting.com